



5	3- Way NO Solenoid Valve	24 Vac, 60 Hz, N.C.	9	Piston	Allows Dirt Collector Motion
4	Differential Pressure Switch	Preset to 7 psi	8	1" Drain Line	Customer Supplied
3	C O V	Controlled Outlet Valve	7	Rinse Valve	Normally Closed Diaphragm
2	Outlet Isolation Valve	Customer Supplied	6	Controller	OMNITROL 400 Shown
1	Inlet Isolation Valve	Customer Supplied	5	3- Way NO Solenoid Valve	24 Vac, 60 Hz, N.C.
No.	Description	Notes	No.	Description	Notes

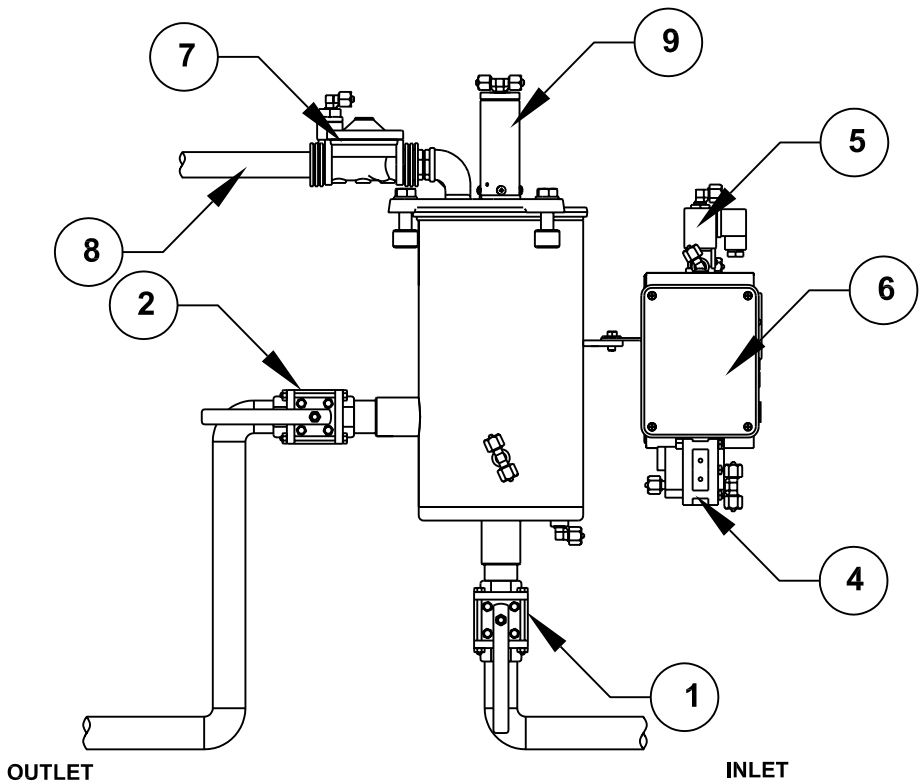

WITHOUT C.O.V.

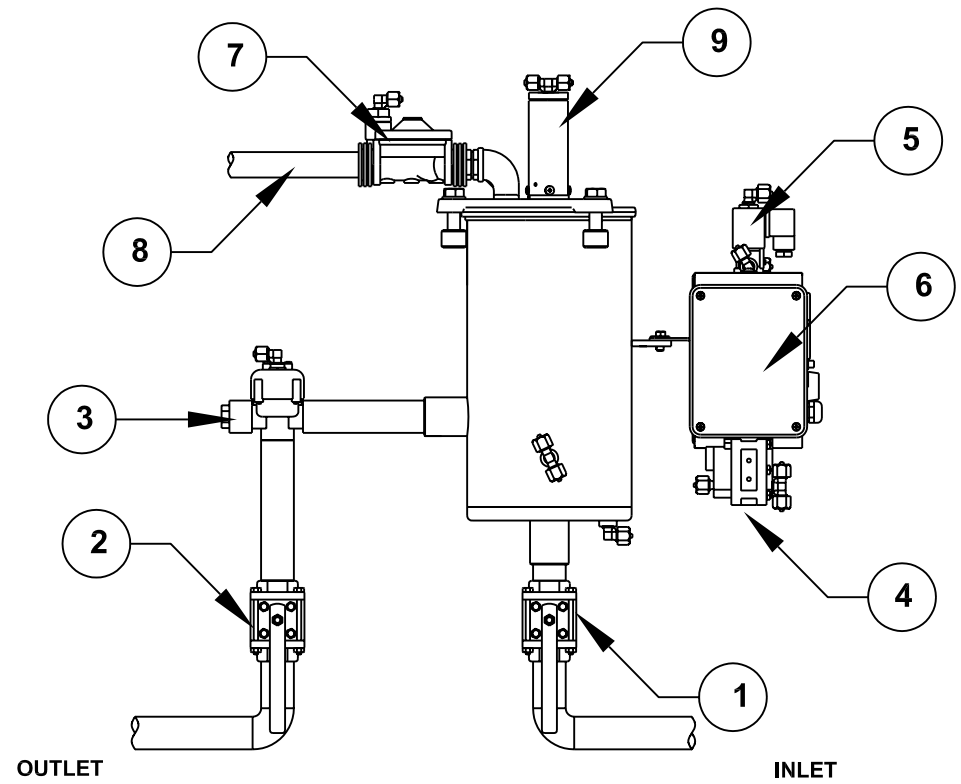

WITH C.O.V.

DWG. NO. 4002	SCALE: NONE	ORIVAL, INC. 213 S. VAN BRUNT ST. ENGLEWOOD, N.J. 07631 TEL (201) 568-3311, FAX (201) 568-1916
DRAWN BY: G KALINOWSKI	DATE: 11/28/05	
TYPICAL ORV FILTER INSTALLATION WITHOUT BYPASS		